



# GROUT & TILES

Cleans mineral joints and tiles gently yet powerfully without harming the material. Efficiently removes detergent residues, care product remnants, body fats, and other organic deposits deep into the pores. No pre-wetting necessary.

## SUITABLE FOR


Mineral Joints

Ceramic Tiles

Natural Stone Tiles

Wall and Floor

Porcelain Stoneware

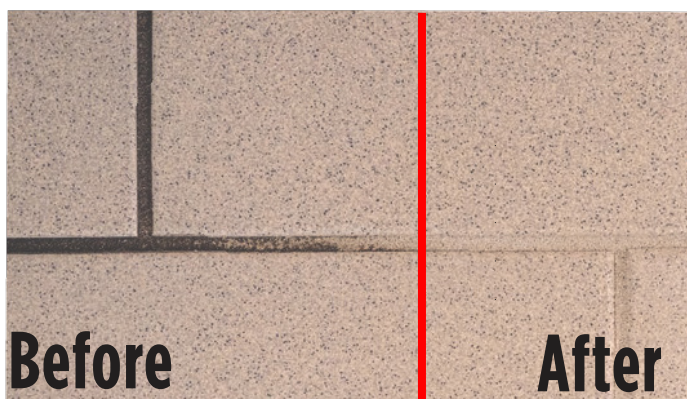

## AVAILABLE AS

2x0.4L Twin Sprayer Set

4x0.4L Reload Set

2x1L Set

Set of 2x5L

Set of 2x10L



**WSP**

WHITE STONE PATTAYA

[www.whitestonepattaya.com](http://www.whitestonepattaya.com)

[contact@whitestonepattaya.com](mailto:contact@whitestonepattaya.com)



## Product Data Sheet

arvox<sup>PRO</sup>

## GROUT + TILES

## APPLICATION

**Preparation:** Remove coarse dirt from the surface. Cover areas that should not be treated, if necessary. May corrode metals. Test surface compatibility on an inconspicuous area. Use only clean spray heads or pressure sprayers.

**Application:** Thoroughly spray the surface to be cleaned with Arvox Pro A and ensure full coverage. Then apply Arvox Pro B in the same manner. Work Arvox in with a grout brush, scrubber, or sponge. After approximately 5-15 minutes, follow up with water and a brush and rinse off. For machine application, go over the area with a single-disc machine and a suitable cleaning pad and vacuum. Then rinse with clear water and vacuum again.

Coverage: approx. 5-10m<sup>2</sup>/L (0.5 L per component)

**Please Note:** For resin joints, test on an inconspicuous area before application. Cover any aluminum parts that may be installed beforehand. Rinse tools/machines and other equipment thoroughly after use. Ensure good ventilation.

## HANDLING AND STORAGE

Arvox Pro Grout + Tiles is stable for at least 24 months when stored as recommended in the original container. Store in a place accessible only to authorized personnel. Keep cool, dark, and upright. Heat, sunlight, and frost can impair the product's effectiveness. Use opened containers within 3 months. Dispose of product residues and containers according to official regulations.

## SAFETY PRECAUTIONS

The usual safety precautions when handling chemicals should be observed. In particular, protective gloves, goggles, protective clothing, and a mask should be worn. Detailed safety instructions can be found in the safety data sheets for Arvox Pro Grout + Tiles A and B.

DISCLAIMER These details have been prepared according to our current level of knowledge. They do not constitute a guarantee of product characteristics or a legal claim. Due to the variety of applications and conditions, we always recommend testing our products for the intended applications. Safety data sheets with precautions for handling or storing Arvox Pro products are available upon request and are provided in accordance with applicable laws. You should obtain and review the relevant safety information before handling any of these products. For further information, please contact White Stone Pattaya Co., LTD.

## MANUAL APPLICATION

The components are worked in using a brush, scrubber, or pad.



## MECHANICAL APPLICATION

Preferably work in the components with eccentric



cleaning machines and suitable pads.

>Our recommendation:  
Use sprayers with a dual-chamber system for simultaneous application of both components.



## ARVOX PRO A

Ingredients (according to 1272/2008/EC) Sodium Hydroxide; (according to 648/2004/EC) Not relevant.

Appearance	Clear
Color	Colorless
Scent	Distinctive/Alkaline
Density	1.106 g/cm <sup>3</sup>
Dynamic Viscosity	15 mPa.s
pH	14

## ARVOX PRO B

Ingredients (according to 648/2004/EC): 5% - <15% Oxygen-based bleach.

Appearance	Like water
Color	Colorless
Scent	Very weak, distinctive
Density	1.026 g/cm <sup>3</sup>
Dynamic Viscosity	1.1 mPa.s
pH	3-4

Values measured at 20° C



Listed with FiBL