




# PARQUET+ FLOORBOARDS

Quickly and efficiently cleans oiled and untreated wood floors. Perfect for deep cleaning. Removes scuff marks and dissolves organic grime. Ideal as a pre-treatment for subsequent parquet care.

## SUITABLE FOR

untreated and oiled  
parquet + wooden floors  
dust-free parquet renovation

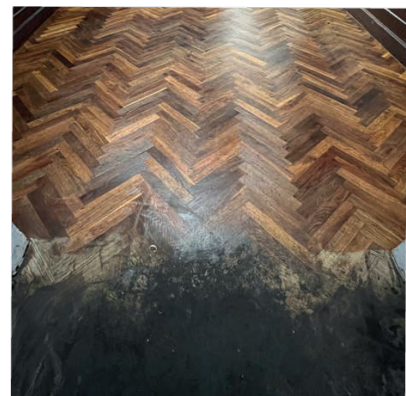

## AVAILABLE IN

2x5L Set



**WSP**

WHITE STONE PATTAYA

[www.whitestonepattaya.com](http://www.whitestonepattaya.com)  
[contact@whitestonepattaya.com](mailto:contact@whitestonepattaya.com)



# PARQUET + FLOORBOARDS

## APPLICATION

**Preparation:** Remove coarse dirt from the surface. Cover areas not to be treated if necessary. May attack metals. Test surface compatibility in an inconspicuous spot. Use only clean spray heads or pressure sprayers.

**Application:** Spray Arvox Pro A and B on the surface to be cleaned in quick succession, ensuring even coverage. Work in small sections. Allow Arvox to act briefly and then work in with a scrubber or cleaning pad. For machine application, use a single-disc machine with a suitable cleaning pad to go over the area. Pick up the dirt solution. Wipe with clear water, leaving a slight moisture.

Coverage: approx. 4-10m<sup>2</sup>/L (0.5 L per component)

**Please note:** Cover or remove any installed aluminum parts beforehand. Spray A & B quickly one after the other, preferably simultaneously on the surface. Shortened exposure time - maximum 5 minutes. Post-treatment with suitable care products after application. Rinse tools/machines and other work equipment thoroughly after use. Ensure good ventilation.

## HANDLING AND STORAGE

Arvox Pro Parquet + Floorboards is stable for at least 24 months when stored as recommended in the original container. Store in a location accessible only to authorized persons. Storage should be cool, dark, and upright. Heat, sunlight, and frost can affect the product's effectiveness. Use opened containers within 3 months. Dispose of product residues and containers according to official regulations.

## SAFETY PRECAUTIONS

Observe the usual safety precautions when handling chemicals. In particular, wear protective gloves, goggles, protective clothing, and a mask. Detailed safety instructions can be found in the safety data sheets for Arvox Pro Parquet + Floorboards A and B.

**DISCLAIMER** This information has been created according to the current state of our knowledge. It does not constitute a guarantee of product properties nor a legal claim. Due to the diverse applications and conditions, we always recommend testing our products for the intended applications. Safety data sheets with safety precautions to be observed when handling or storing Arvox Pro products are available upon request and are provided in compliance with applicable laws. You should obtain and review the relevant safety data sheet information before handling any of these products. For further information, please contact White Stone Pattaya Co., LTD.

## MANUAL APPLICATION

The components are worked in with a scrubber or pad.



## MACHINE APPLICATION

Integrating the components is best done with eccentrically operating cleaning machines and suitable pads.



>Our recommendation:  
Use sprayers with a dual-chamber system for simultaneous application of both components.



## ARVOX PRO A

Ingredients (according to 1272/2008/EC) Sodium hydroxide; (according to 648/2004/EC) Not relevant.

Appearance	Clear
Color	Colorless
Odor	Characteristic/Alkaline
Density	1.021 g/cm <sup>3</sup>
Dynamic Viscosity	11 mPa.s
pH	12-13

## ARVOX PRO B

Appearance	Like water
Color	Colorless
Odor	Very faint, characteristic
Density	1.026 g/cm <sup>3</sup>
Dynamic Viscosity	1.1 mPa.s
pH	3-4

Values measured at 20° C